




AXE Pumps HD-M Series


Capabilities of the HD-M series are designed for tough, abrasive applications, offered in a variety of materials to achieve optimum performance in both wear life and efficiencies. A Proudly South African, locally re-engineered, manufactured and assembled product.

Technical Specification

- Discharge Sizes: 1,5" - 10"
- Maximum Flow Capacity to 2800m³/h
- Heads to 85m
- Wear Components: High –Chrome, Seal Type Offered: Gland Packed Stuffing Box, Centrifugal/Expeller Sealed and Mechanical Seal
- Bearing Assemblies: Standard Capacity and High Capacity, Grease Lubricated, only top tier bearing brands used in all AXE assemblies

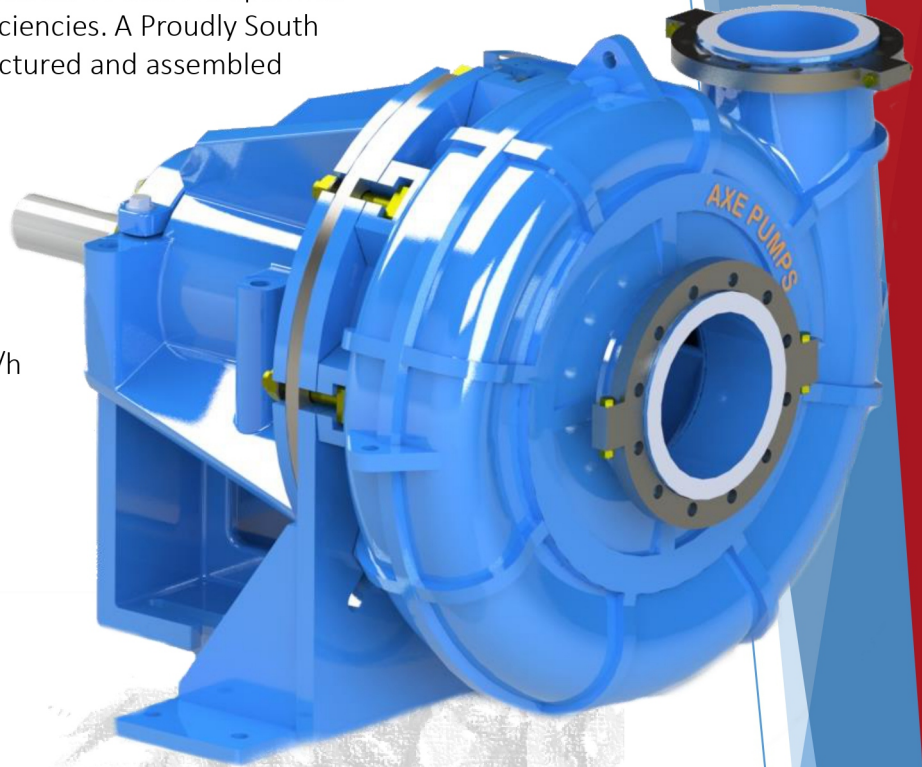


HD-M Range and Quick Selection Chart

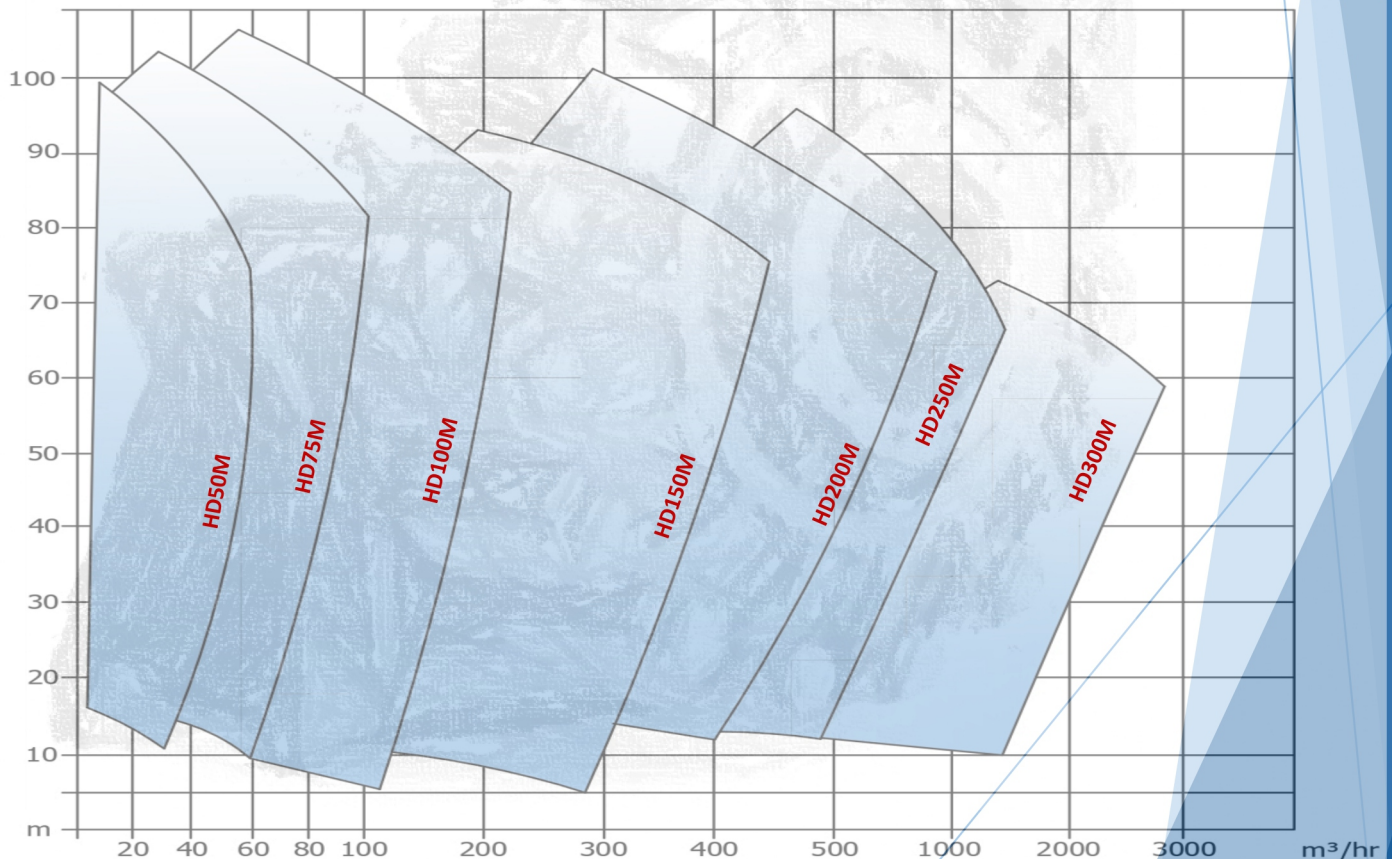

AXE Pumps & Spares



HD-M Series: Metal Lined

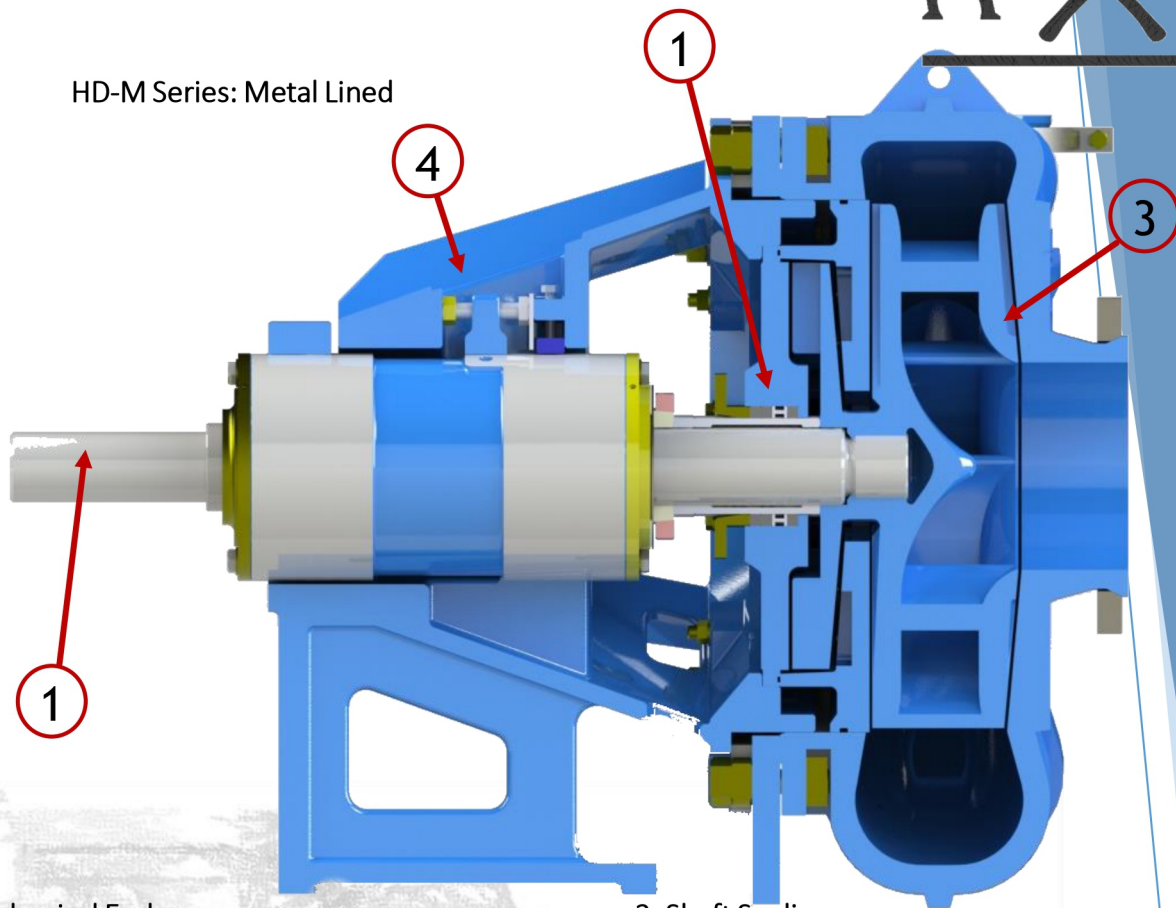

1. Mechanical End

- Top Tier Brand of bearings used in all AXE bearing assemblies.
- Various material options available application dependant.
- Available in standard capacity as well as high capacity
- Heavy duty shaft with large diameter

2. Shaft Sealing

- Available in Gland packed Stuffing box, Centrifugal/Expeller Seal & Mechanical Seals
- High quality packing in combination with the correct material shaft sleeve ensures extended life of the bearing assembly.

3. Wet End Wear Components

- Metal Lined HD-M series Pumps are commonly supplied using 27% High Chrome Iron, AXE offer variety of materials determined by the pump application and are of the highest quality, locally manufactured castings, machined inhouse to ensure consistency through our ty management process.

4. Ductile

- Bearing frame & bearing housing are SG42 Ductile Iron but are also available in other selected materials determined by application.

Titan Pumps SA (PTY) Ltd

VAT No: 4140296023

Company Registration:

2021/4485600/07

Level Two BEE

Email: titanpumps@telkomsa.net

Tel: 018 473 1555

Cell: 072 386 7710

AXE Pumps & Spares