




Titan Pumps

Description	
Product Name	Titan 125mm Vertical Spindle
	Pump 37kw 4P
Technical info	125mm-37kw 4p
MaxHead	42m
Max Flow	63l/s
Impeller Diameter	343mm
Type of Impeller	Open Double suction Keyed
Max Solids	19mm
Pump weight	bare shaft 380Kg
Pump weight	c/w 37kw 673Kg
Best eff. Point	56%
Material	
Casing/Volute	Cast Iron poly urethane lined
Impeller	Poly urethane
Cover plate	Polyurethane lined
Upper & Lower Screen	Poly urethane
Bearing housing	Mild steel
Pump Shaft	EN8
Motor	Cast Iron /All Steel/Steel Frame
Installation	
Max ambient temp	60°C
Pump Outlet	4" Table D / 5" Table D
Max installation depth	785mm
Liquid	
Density	Max 1,4 SG
Temp	0 to 60°C
PH	4 to 8
Electrical info	
RPM	1440 / 4P
Kilowatts	37Kw 50Hz IE3
Voltage	380 v / 525 v
Start Method	D-O-L
Motor Flange size	450 OD

Accessories	
Control Panel	
Water level probe	
Metal Sump	
Tail piece	300mm to 1800mm
(extended Lower suction)	

Pump Curve 125mm Titan-37kw 4P
STD

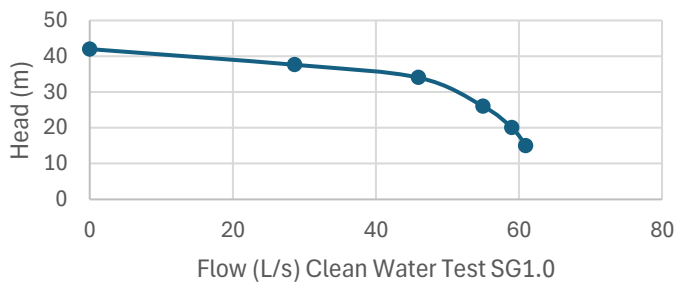

Power Curve 125mm Titan-37Kw 4P

